

Owner's Manual

Croozer Baby Supporter

Congratulations on buying the Croozer Baby Supporter. This purpose-built accessory helps your small child sit up straight and offers additional comfort when he/she is asleep.

The Croozer Baby Supporter can also be used in Chariot child transporters. On the two-seater Croozer model this does lead to considerable reduction in seat width.

1. Fitting the Baby Supporter

Note: The terms "left-hand" and "right-hand" are used as seen in direction of travel.


1.1 Fitting to Chariot Child Carriers

Undo the buckles of the padded shoulder harness to remove it.

Locate the Baby Supporter in the carrier so that the triangular cushion is on the surface of the seat.



From the back, thread the right-hand half of the hip strap through the elastic loop on the right-hand side of the baby supporter. Repeat this procedure on the left-hand side.

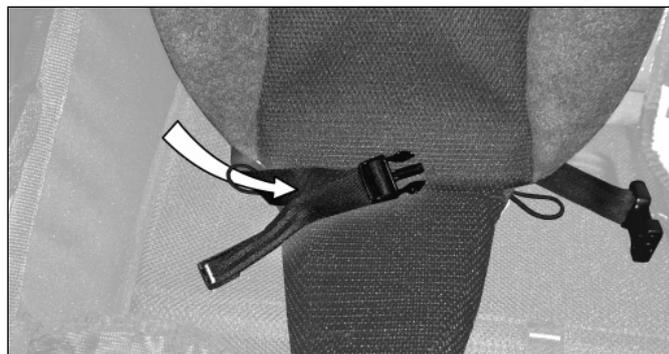

Thread the buckle of the crotch belt through the rubber band on the end of the triangular cushion.



Push the head support up a bit by undoing the Velcro fastener at the back of the Baby Supporter.

Thread both buckles of the padded shoulder harness backwards through the gap between the lower cushion and the head support.



Fasten both buckles of the padded shoulder harness behind the Baby Supporter.



The buckles should be in their lowest position.

DANGER

Always make sure that the buckles of the padded shoulder harness are fully engaged. Otherwise, in the event of an accident the seatbelt system may fail, and your child may be seriously or fatally injured.

1.2 Fitting to Croozer Child Carriers

Remove the head support from the Baby Supporter after undoing the Velcro fastener. Locate the Baby Supporter in the carrier so that the triangular cushion is on the surface of the seat.



Put the two top halves of the belt on the back cushion of the Baby Supporter. The two belt halves must be between the two side cushions and between the two nylon pins that hold the head support.



In Croozer carriers the two side loops serve no function. Here the position of the Baby Supporter is precisely defined by the shape of the seat.

DANGER

Always make sure that the two halves of the belt are between the nylon pegs that hold the head support. Otherwise, in the event of an accident the seatbelt system may fail, and your child may be seriously or fatally injured.

Refit the head support by inserting the two pegs in the two fabric pockets on the sides. Press down the Velcro fastener on the back of the Baby Supporter to fasten it again.



Thread the buckle of the crotch belt through the rubber band on the end of the triangular cushion.



2. Strapping your child in

Put your child in the Baby Supporter and strap him/her in as described in the Owner's Manual of your child carrier.

Adjust the height of the head support so that your child's head is in the middle of the head support.



To adjust the head support, undo the Velcro fastener at the back of the Baby Supporter. Once you have adjusted the head support, press down the Velcro fastener to fasten it again.

3. Using the Baby Supporter in the Bicycle Trailer

TIP

When you use your child carrier as a bicycle trailer, we recommend that a suitable approved protective helmet be worn. If this is the case, the head support will get in the way, and it should therefore be removed. If you do this, make sure you also remove the two nylon pegs that hold the head support.